


MISURA MONITOR 25" FLAT

USER MANUAL [ENGLISH](#)

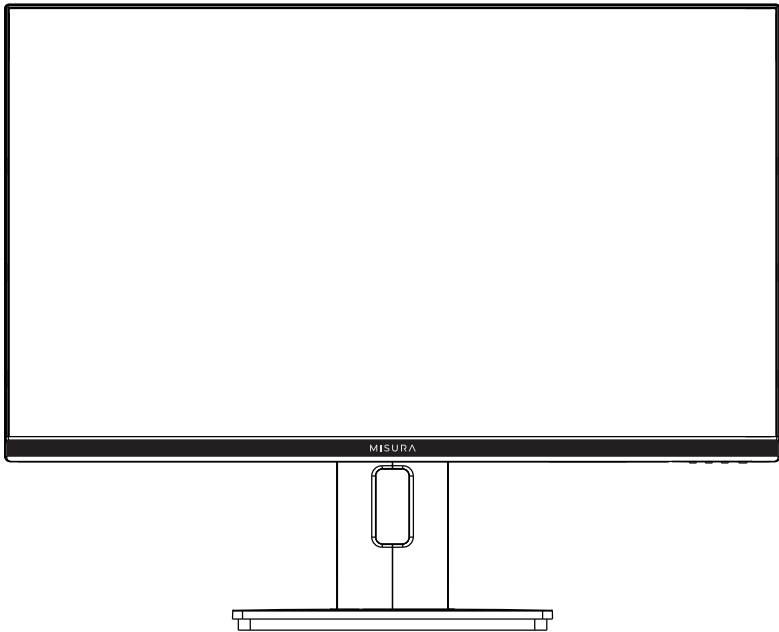

Model: P23QG25DFA01B – 250 Hz

1080

Full HD resolution
1920x1080

240Hz

240 Hz refresh
frequency

HDR

High Dynamic
Range

178°

Ultra Wide
Viewing Angle

VA

VA
Curved panel

1 ms

Moving Picture
Response Time



FreeSync & G-Sync
Technology



Low Blue Eyes
Technology

GENERAL INFORMATION

Dear Customer,

Thank you for having purchased this product. This document describes how to install and use the LED backlit LCD color monitor. Read this manual which contains information for correct, safe use. Keep this manual at hand so that you can refer to it when needed.

General features

- DC 12V Power Input
- Display area
- Wall mounting VESA standard 100*100mm (Not included bracket)
- DP Input video input Interface
- HDMI Input video input Interface
- Audio Output Interface
- Multilingual OSD menu for easy setting and optimization of the display

Opening the box

Check that the packing and the contents are not visibly damaged. Contact the reseller immediately if parts are either missing or damaged. Do not attempt to use the device in this case. Send the product back in its original packing if it is damaged.

Contents of the box

- Monitor
- Power Adapter
- HDMI cable
- User's manual
- Table stand

Important Note: Accessories may be changed without prior notice.

WARNINGS

Power

- Only use the power unit provided to power the device. Check mains rating before plugging the power unit in.
- Do not pull the cable to unplug the device.

Safety precautions

- Keep the device away from rain and humidity to prevent risk of fire and electrocution. Do not introduce material (solid or liquid) inside. If this should accidentally occur, disconnect the device from the mains and have it inspected by qualified personnel.
- Never open the device. In all cases, contact the qualified personnel or authorized service center for repairs.
- Keep the device away from children, to prevent accidental damage.
- Do not touch the device with wet hands to prevent electrical shock or mechanical damage.
- Do not use the device if it should fall or the external casing is damaged. Risk of electrocution if the device is used in such conditions. Contact the reseller or your installer.
- It is advisable to disconnect the power wire if the monitor is not used for an extended period.

Installation precautions

- To prevent overheating the device, arrange it in a position allowing the flow of air through the slots in the casing. Ensure at least 5 cm of free space when installing inside a rack. For the same reason, do not install sources of heat, such as radiators or hot air ducts. Keep away from direct sunlight. Do not install in areas subject to excessive dust, mechanical vibrations or shocks.
- Do not arrange this device on an unstable surface, such as a tottering or slanted table. The device could fall causing injury or mechanical failures.
- Do not install the device in a place where it could be exposed to humidity or water. Do not direct a jet of water onto the device: risk of fire, electrocution or mechanical failure.
- Stop using the device if water or other material should penetrate inside: risk of fire and electrocution. Contact the retailer or authorized installer.
- Slots and openings in the cabinet are provided for ventilation. These openings must not be blocked or covered.

- Do not place heavy or heat generating objects on top of the device: this could damage the casing and/or increase internal temperature causing faults.
- Do not cover the device with a cloth while it is running to prevent deforming the external casing and overheating the internal parts: risk of fire, electrocution and mechanical failure.
- Keep magnets and magnetized objects away from the device to prevent faults.
- Do not use the device in presence of smoke, vapor, humidity, dust or intense vibrations.
- Wait for a while before operating a device immediately after transporting it from a cold place to a warm place and vice versa. Wait on average for three hours: this will allow the device to adapt to the new ambient (temperature, humidity, etc.).
- The monitor is provided with a plastic base and rubber feet. It can be positioned on a horizontal surface, such as a desk or a table. Make sure that the device is fastened firmly and that it is not resting on unstable supports or surfaces. Dropping could cause severe injury and damage the device.
- Remember to adjust the brightness and contrast to obtain a perfect image.
- The monitor can also be installed on the wall by means of a bracket (not provided).


Cleaning the device

- Rub delicately with a dry cloth to remove dust and dirt.
- Dip the cloth in neutral detergent if dirt cannot be eliminated with a dry cloth alone.
- Do not use volatile liquids (such as petrol, alcohol, solvents, etc.) or chemically treated clothes to clean the device to prevent deformation, deterioration or scratches to the paint finish.

Privacy and copyright

- The monitor is a device for Computer systems. Recording of images is subject to the laws in force in your country. Recording of images protected by copyright is forbidden.
- Product users shall be responsible for checking and respecting all local rules and regulations concerning monitoring and recording video signals. The manufacturer SHALL NOT BE LIABLE for use of this product not in compliance with the laws in force.

MONITOR INPUTS

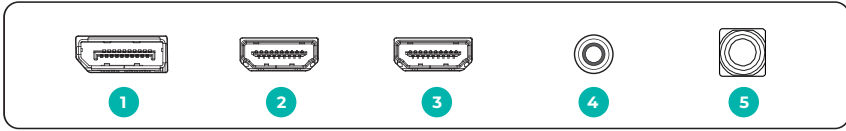

1 | DP

2 | HDMI 1

3 | HDMI 2

4 | AUDIO OUT

5 | DV 12V

ACCESSORIES

1 | 25 Inch Monitor



2 | Stand

3 | HDMI Cable

4 | Power Adaptor and Power Cable

5 | User manual

MONITOR CONTROL BUTTONS

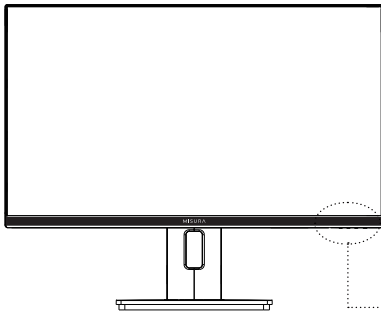

1	M	Open the Main OSD Menu and Select submenu
2	◀	Go Down on the Main OSD Menu Decrease the value of a selected item
3	▶	Go Up on the Main OSD Menu Increase the value of a selected item
4	E	Select signal source or Exit OSD
5	⏻	Turn the monitor on or Off

INITIAL SETUP



Connect the monitor to a power outlet.

1. Press the POWER button on the monitor or to turn it on (The indicator will be blue).
2. Connect the relevant cable to the corresponding input on the monitor. The source will be automatically detected.
3. To change between inputs, press the "EXIT" button to enter the source menu. Use the "◀" and "▶" buttons to choose the input source between DP and HDMI 1, HDMI 2.

OSD MENU CONTROLS

Brightness




Brightness: Allows the adjustment of the image brightness, according to ambient light in the room. Value “0-100” | **Contrast:** Allows the adjustment of the contrast between white and black areas of the image. Value “0-100”

Black Level: Allows adjustment of the Black Level of the OSD, value “0-100”.

ECO: Allows selection of image settings between the following: Standard, Text, Movie, Game, etc. **HDR:** Allows the HDR Mode to be turned ON and OFF.


Image

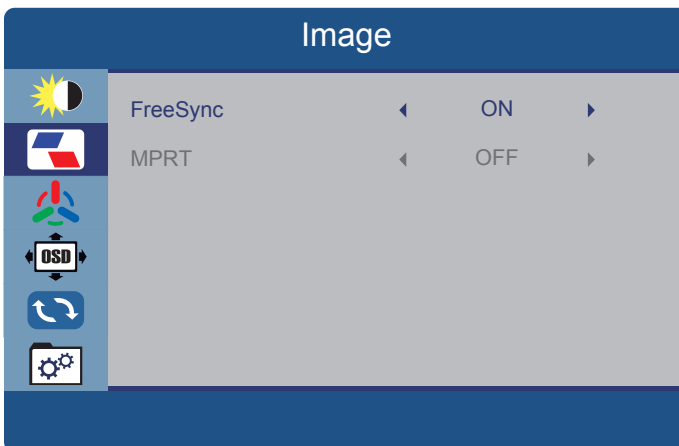

FreeSync: Allows FreeSync to be turned ON and OFF.


MPRT: Allows MPRT to be turned ON and OFF.

Color Setting

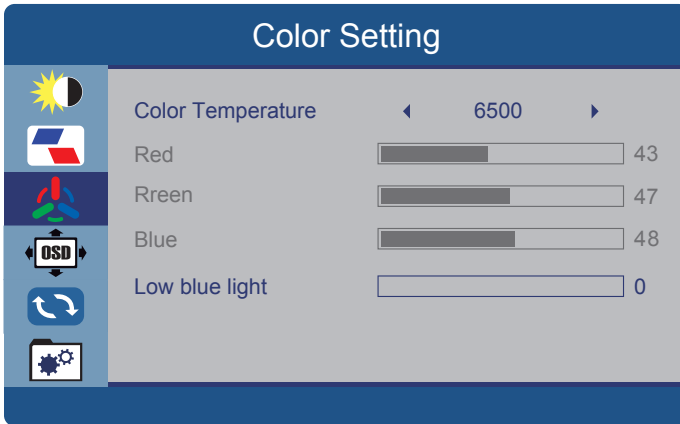

Color Temperature: Allows adjustment of the color temperature between the following options: 6500 – 7500 - 9300 - User. | **Red:** Allows adjustment of the red element of the image. | **Green:** Allows adjustment of the green element of the image. | **Blue:** Allows adjustment of the blue element of the image. | **Low blue light:** Allows adjustment of the Low blue light of the OSD, value “0-100”.

OSD Setting

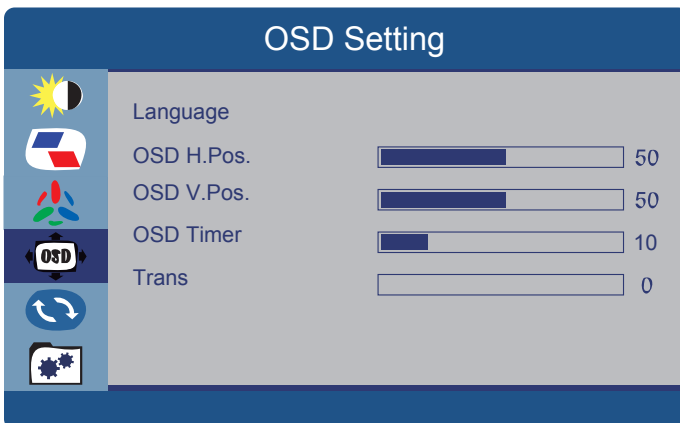

Language: Allows selection of desired language: “ENGLISH, FRENCH, TURKISH, ITALIAN, SPANISH, PORTUGUESE, CHINESE, DUTCH, JAPANESE, GERMAN, POLISH, AND KOREAN.”


OSD H. Pos: Allows adjustment of the horizontal position of the OSD

OSD V. Pos: Allows adjustment of the vertical position of the OSD

OSD Timer: Allows adjustment of the duration of the OSD, value “10-60”

Transparency: Allows adjustment of the transparency of the OSD, value “0-100”.


Reset

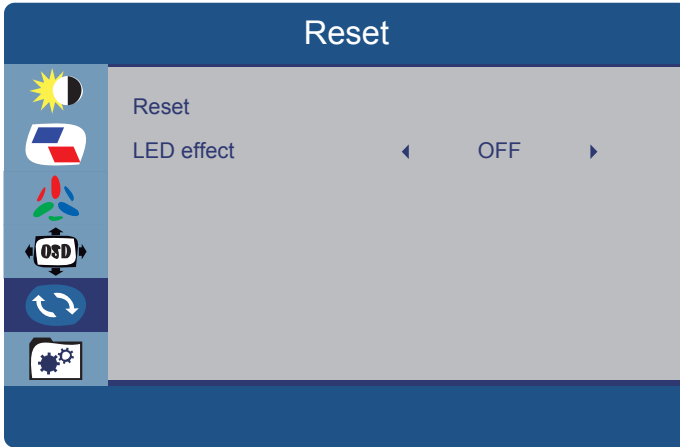

RESET: Returns the monitor to its factory default settings.

LED effect: Allows LED effect to be turned ON and OFF.

F.Extra

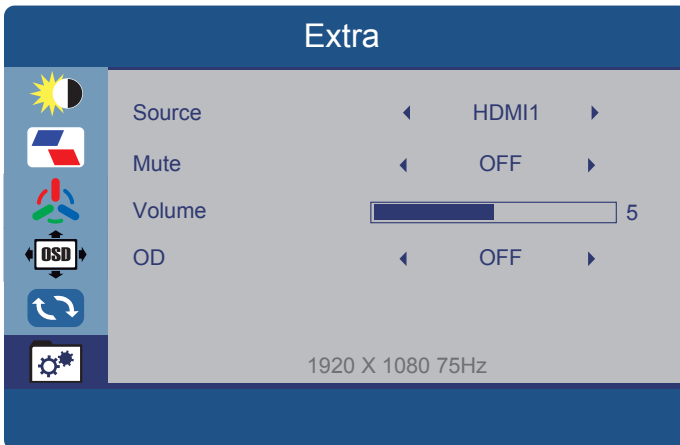

Source: Allows user to choose the signal source from "HDMI 1, HDMI 2 and DP".


Mute: Allows Mute to be turned ON and OFF.

Volume: Allows adjustment the Volume of the monitor, value "0-10".

OD: Allows the Overdrive function to be turned ON and OFF.


TECHNICAL SPECIFICATION

Model	P23QG25DFA01B – 250 Hz
Size & Type	24.5"
Panel Type	VA
Brightness (Max)	350 cd/m2
Contrast Ratio	5000:1 (Typ.)
Display Color	16.7 Million Colors
Viewing Angle	178° (H) / 178° (V)
Response Time	MPRT 1 ms
Resolution	1920 x 1080
Aspect Ratio	16:9
INTERFACE	HDMI*2
	DP*1
Electrical Ratings	12V DC, 4A (AC 100-240V, 50/60 Hz)
Power Consumption	Typical 32W

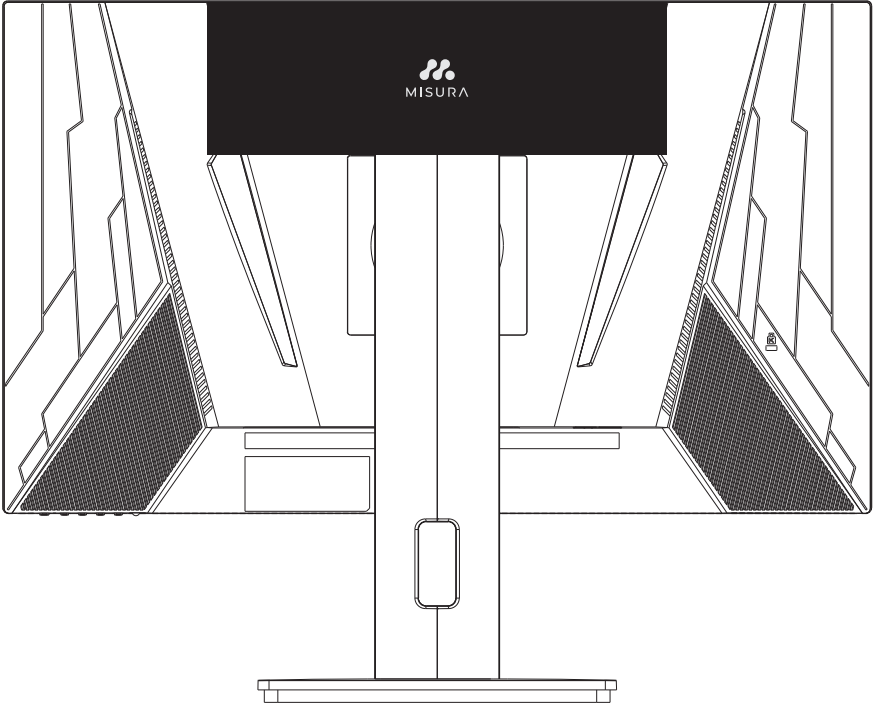



**Manuál v Češtině otevřete zde /
Manuál vo Slovenčine otvoríte tu /
Open the English manual from here /
Das Handbuch in Deutsch können Sie öffnen hier /
A magyar nyelvű kézikönyvet itt tudja megnyitni /
Odprite priročnik v slovenščini tukaj /
Aprire il manuale in italiano qui /**



URL: www.misura.shop/en/advisor/m16t-manual-for-download